

The market requires even more powerful **special equipment** in the future based on **individual problem solutions**.
 We want to meet these requirements using our expertise in combination with our core competences and the Baka efficiency in collaboration with our capable partners.



Wir bauen Stapler nach Maß

mehr als 50.000 Sondergeräte

... über 300 auf

www.bAKA.de

References:

Aleris, Aluplast, Audi, BMW, Bosch, Continental, Corovin, Daimler, Dethleffs Wohnmobile, Deutsche Bundeswehr, Deutz, EADS, EvoBus, Fiege-Engineering, Gaerner, Grässlin, Habisreutinger, Handtmann-Armaturen, Heidelberger-Druck, Hilti, Hoechst, Hörmann Türen, Hüller Hille, INA Schaeffler, ISE Industries, Kaiser + Kraft, Kärcher, Knauf Gips, König & Bauer, Krauss-Maffei, Loher Raumexklusiv, Mahle, MAN, Mercedes Benz Gebrauchtteile-Center, Metabo, MTU, Neumag, Niehoff, nkt cables, Peugeot, Porsche, Renault, Schefenacker, Siemens, Stahl, Viessmann, Volkswagen, Windhoff, ZF


Presented by:



D. Bader Söhne GmbH & Co. KG · Germany

Rathausstraße 37 · D-73630 Remshalden
 Postfach 1320 · D-73626 Remshalden
 Telefon: +49 (0)7151/7006-0
 Telefax: +49 (0)7151/7006-50
 E-mail: Verkauf@baka.de · Internet: www.baka.de

2009/08 Quick Overview Container tilting tables

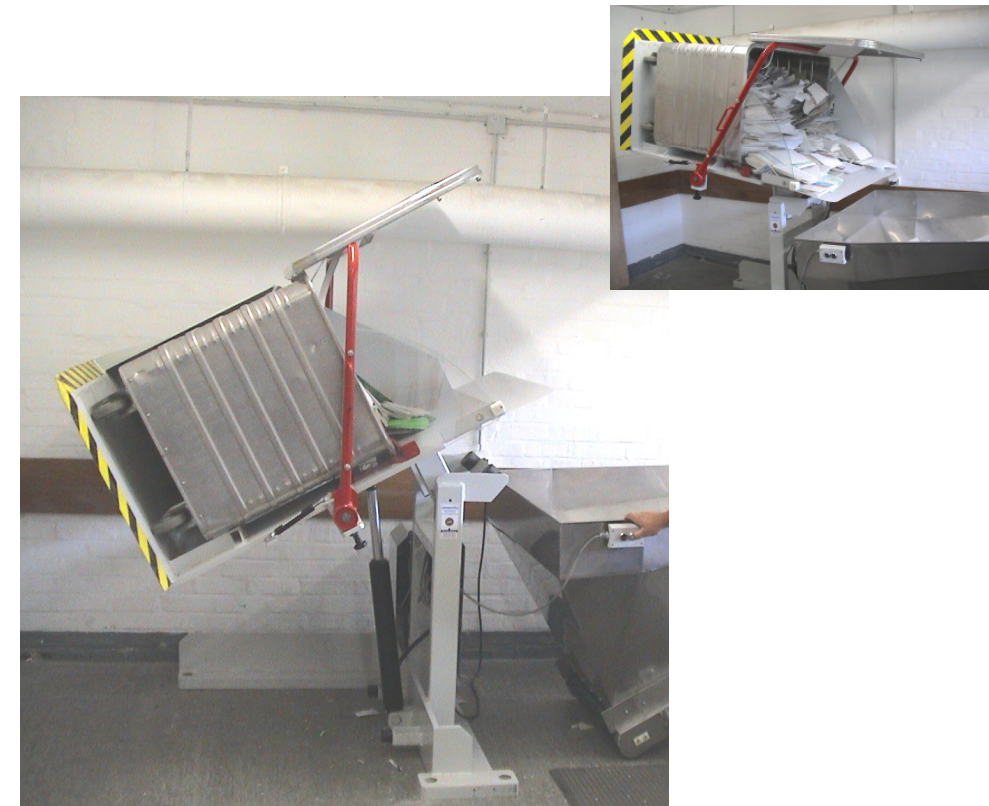

Container tilting tables

We build customised forklifts



SO E 28965, BKE 1,5, Load capacity 1000 kg, Tilting degree 110°, Emptying height ca. 900 mm, Platform LxW 1550x1250 mm, push button control on 2m cable, 230 V mains hydraulics



SO E 28922, electrical tilting device, Load capacity 1000 kg, Inclination 10°, Carrier rollers vertical or horizontal, Horizontal position 1015 mm, Table LxW 1500x2500 mm, Track gauge 2000 mm,



SO E 30713, BKE 0,5 SO, Load capacity 400 kg, Emptying height ca.1200 mm, tipping angle ca. 130°, push button control on 5m cable, 230 V mains hydraulics




SO E 30989, BKE 1,5 SO, Load capacity 1500 kg, Tilting degree 90°, Emptying height at 90° ca. 894 mm, Board form length /-width 1070x1300 mm, push button control point on vertical column, 230 V mains hydraulics



SO E 29243, BKHE 0,5, Load capacity 500 kg, Emptying height 950-1450 mm with initial lift, Tilting degree 125°, pivotable V2A cowling with outlet, 230 V mains hydraulics



SO E 30262, BKE 0,5 SO, Load capacity 250 kg, Emptying height ca. 1000 mm, tipping angle ca. 120°, adjusted for two container sizes, push button control on 5m cable, 230 V mains hydraulics

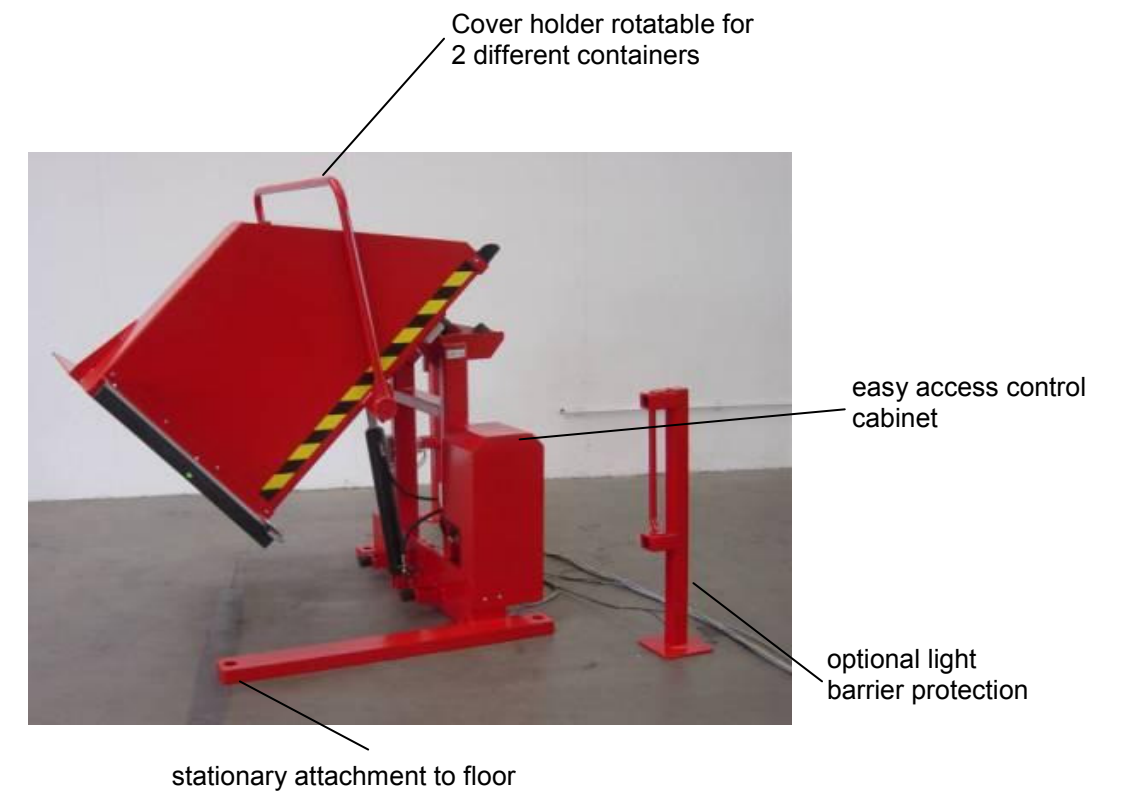

SO E 29888, BKE 0,5, Load capacity 280 kg, Emptying height 1000 mm, tipping angle 130°, for holding mobile disposal containers, push button control on 5m cable, 230 V mains hydraulics, light barriers with stands as safety device



SO E 29971, BKE 1,5, Load capacity 1000 kg, Tilting degree ca. 90°, height pivoted at 90° 1095 mm, fork length 1150 mm, Fork load width 560 mm, 230 V mains hydraulics



SO E 30477, BKE 2,0, Load capacity 2000 kg, Tilting degree ca. 80°, stationary version, operation with foot button on 2m cable, 230 V mains hydraulics