

The market requires even more powerful **special equipment** in the future based on **individual problem solutions**.
 We want to meet these requirements using our expertise in combination with our core competences and the Baka efficiency in collaboration with our capable partners.



Wir bauen Stapler nach Maß

mehr als 50.000 Sondergeräte

... über 300 auf

www.baka.de

References:

Aleris, Aluplast, Audi, BMW, Bosch, Continental, Corovin, Daimler, Dethleffs Wohnmobile, Deutsche Bundeswehr, Deutz, EADS, EvoBus, Fiege-Engineering, Gaerner, Grässlin, Habisreutinger, Handtmann-Armaturen, Heidelberger-Druck, Hilti, Hoechst, Hörmann Türen, Hüller Hille, INA Schaeffler, ISE Industries, Kaiser + Kraft, Kärcher, Knauf Gips, König & Bauer, Krauss-Maffei, Loher Raumexklusiv, Mahle, MAN, Mercedes Benz Gebrauchtteile-Center, Metabo, MTU, Neumag, Niehoff, nkt cables, Peugeot, Porsche, Renault, Schefenacker, Siemens, Stahl, Viessmann, Volkswagen, Windhoff, ZF

Presented by:



D. Bader Söhne GmbH & Co. KG · Germany
 Rathausstraße 37 · D-73630 Remshalden
 Postfach 1320 · D-73626 Remshalden
 Telefon: +49 (0)7151/7006-0
 Telefax: +49 (0)7151/7006-50
 E-mail: Verkauf@baka.de · Internet: www.baka.de

2009/09 Quick Overview Electric pedestrian lift truck with load arm



Optional:
 Attachable cabin
 with push button for
 lifting/lowering

Electric pedestrian lift truck
 with load arm

We build customised forklifts



SO E 29875, EGV 2000-34, Load capacity 2000 kg at load centre distance 800 mm, hydraulic side slide +/- 200 mm, lifting height centre load hook 700-4000 mm, hydraulic control proportional using control unit



SO E 30269, EGV 2500-34, Load capacity 2500 kg at load centre distance 1400 mm, lifting height centre load hook 1800-3400 mm, broad gauge wheel arms 1920 mm



SO E 29808, EGV 2000-16, Load capacity 1500 kg / 120 kg, projection 1500 mm / 1800 mm, Lift height 700-2200 mm, manually ejector 300 mm




SO E 28857, EGKS 500, Load capacity 600 kg 400 kg free projection 1180 mm 2150 mm and hook height 1060-2600 mm 770-3150 mm swivel range hydraulic slide left/right 90°



SO E 29340, EGP 3000, Load capacity 3000 kg at load centre distance 1200 mm, Lift height 300-1900 mm, mobile base outside width 1620 mm, safety load hook rotatable 360°



SO E 29566, EGV 60-1010 SO, Load capacity 350 kg to projection 800 mm, ejector 500 mm, hook height 100-1800 mm, extension, can be pivoted manually 10° from centre position

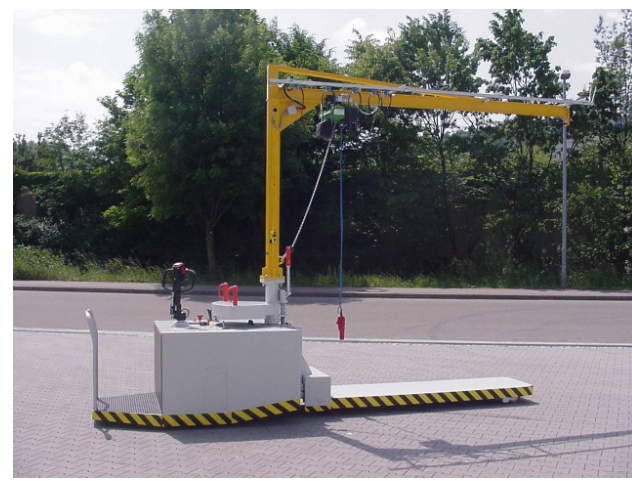

SO E 29591, EGU-5010 SO, Capacity platform 2000 kg, Capacity extension 250 kg, projection 3000 mm, swivel range 2 x 120°, hook height 2600 mm, platform lift 290 mm, fixed passenger platform

